

## Double gang Dual LCD Displays

### Description

Double gang plate with two LCD Displays, 0 - 10Vdc or 4 - 20mA inputs. Standard ranges or can be programmed for any range to suit your application

### Specification

8 Digit backlit LCD displays. Standard double gang plate  
Flush anti -glare window 0 - 10Vdc input

Plate : Standard double gang plate fits standard flush back box 47mm deep  
White plastic, Brushed Stainless steel  
Other finishes available

Displays: Yellow / Green backlit LCD Displays (Blue / White available on request)  
8 digit 12mm high characters  
Backlight On/Off switch


Power: 24Vac/dc 100mA

Input: 0 - 10Vdc or 4 - 20mA

Range: Displays includes parameter units  
Standard Ranges available for most applications. The PCB has a factory programmable chip and we can provide any range to suit your application


Response time: The Displays are programmed to ignore short term disturbances to the input signal by reading the input once per second and displaying the rolling average of the last eight readings

Engraving: Any engraving to suit your requirements

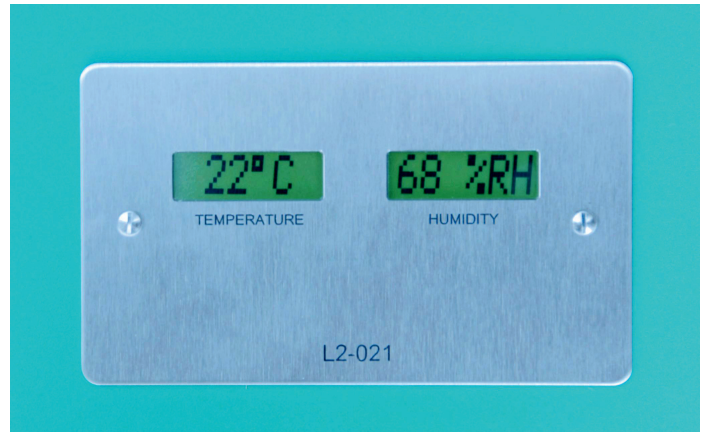

### Ordering information


LCD/DG - 01 - 01 - 01 - 05

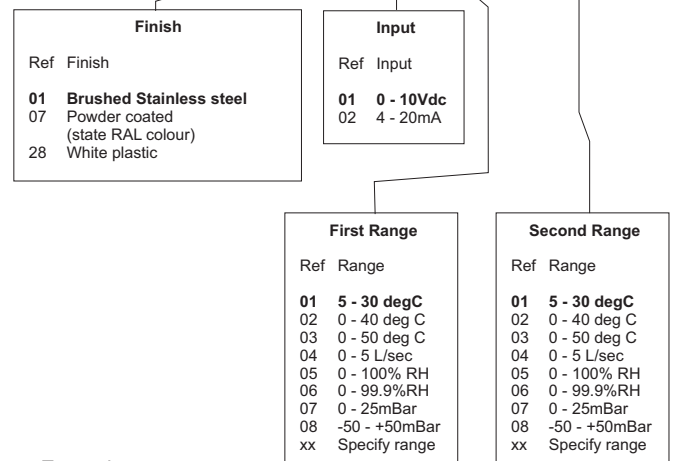

Example:

LCD/DG-01-01-05-01  
Stainless steel plate, 0 - 10Vdc,  
1st range 5 - 30 degC 2nd range 0 - 100%RH

**Bold = Standard item available from stock**

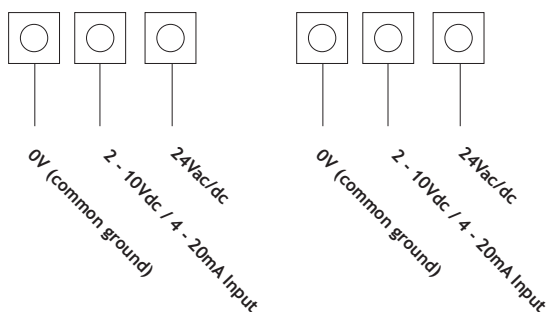

### Associated Products

LCD Display single gang plate  
Display / Alarms  
57mm LED Display  
100mm Display